DISCOVERY


GESSO

VillaePaint

甄图艺墅家

Explore the natural world--Discovery



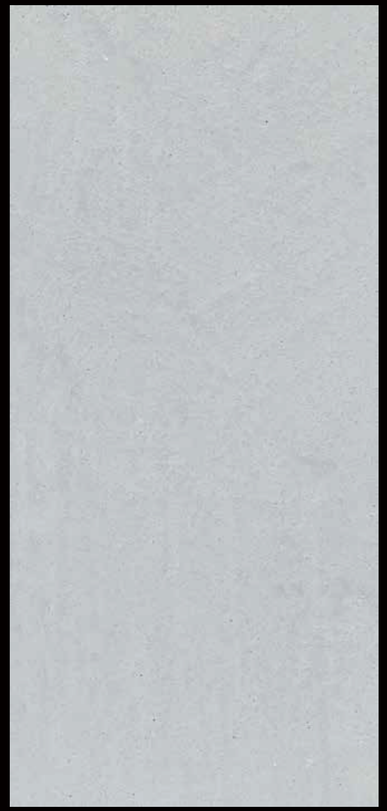

GESSO



8449 B



8464 C

8464 B

8464 A



8493 A

8493 B

8493 C

8449 A

8449 B

8449 C

8425 A

8425 B

8425 C

8448 A

8448 B

8448 C

8475 C

8475 B

8475 A



8456 A

8456 B

8456 C

8470 A

8470 B

8470 C

8481 A

8481 B

8481 C

8467 A

8467 B

8467 C





8434 C

8434 B

8434 A



8489 A

8489 B

8489 C

8435 A

8435 B

8435 C

8484 A

8484 B

8484 C

8469 A

8469 B

8469 C

8483 C

8483 B

8483 A



8437 A

8437 B

8437 C

8499 A

8499 B

8499 C

8471 A

8471 B

8471 C

8472 A

8472 B

8472 C





8466 C

8466 B

8466 A



8536 A

8536 B

8536 C

8453 A

8453 B

8453 C

8534 A

8534 B

8534 C

8476 A

8476 B

8476 C



Discovery - gesso series is a lime-based product with the texture of natural stone. It is made of natural inorganic mineral materials through high-temperature calcining of limestone and fine processing and fermentation. It is an art decorative coating carefully developed with advanced environmentally friendly formulas. This product has excellent plasticity and rich texture expression, as well as good breathability, weather resistance and crack resistance. Its unique texture can simulate various natural effects such as stone and textured walls, giving the wall a rich three-dimensional artistic feel.

Main features:

1. Environmental protection and health: The main ingredients are natural inorganic materials, which are non-toxic, tasteless and non-radiative. The products comply with national environmental protection standards.
2. Excellent adhesion: strong adhesion to the base layer, not easy to peel off, crack or deform, and has high hardness.
3. Moisture-proof: good breathability, moisture-proof, moisture-absorbing, warm in winter and cool in summer.
4. Good plasticity: a variety of texture effects can be shaped according to design needs.
5. Excellent durability: wear-resistant, scrub-resistant, weather-resistant, and long service life.
6. Excellent expression: rich colors and delicate texture, creating a unique artistic atmosphere.

Scope of application:

Suitable for interior decoration in various places such as high-end villas, hotels, clubs, and commercial spaces.

Construction process description:

1. Base layer treatment: Make sure the wall surface is dry, clean, free of oil stains, and free of floating dust. If there are cracks or uneven areas, they need to be repaired and smoothed in advance. Construction of new walls must be carried out after they are fully dry.
2. Penetrating primer treatment: Use the matching penetrating primer PM-NB104 to penetrate and cure the putty base layer through roller coating, spraying or brushing.(Note: The packaging specification of penetrating primer PM-NB104 is 5KG/barrel, and the theoretical coating rate per kilogram is about 10-15 square meters).
3. Primer treatment: Use the matching primer PM-B701 and apply it evenly on the wall through roller coating, spraying or brushing to enhance the adhesion between the surface coating and the base layer and improve the durability of the overall coating. (Note: The packaging specification of primer PM-B701 is 5KG/barrel, and the theoretical coating rate per kilogram is about 6-8 square meters).
4. Apply the gesso series: After fully mixing the gesso series, use a special scraper or professional tool according to the specific effect to apply the first batch of gesso series on the wall to create the desired texture effect. When applying, you should follow the order from top to bottom and from left to right to ensure a uniform thickness. After the first pass of gesso series is dry, continue with the second pass of gesso series. When the second pass of gesso series is dry to 80%, a special scraper needs to be used for flattening and calendering. If there are special functional requirements for the gesso series effect, the surface treatment can be strengthened after the second complete drying.
(Note: The packaging specification of the gesso series is 20KG/barrel, and the theoretical coating rate per kilogram is about 0.8-1.2 square meters).
5. Enhanced topcoat coating: In order to enhance the stain resistance and hardness of the product, the surface of the dry and polished gesso series can be reinforced with matte finish TP-A170Y, and the enhanced finish can be performed by roller coating or spraying. Further protect and beautify the texture effect, and improve the durability and beauty of the wall.
(Note: The packaging specification of TP-A170Y with matte finish is 5KG/barrel, and the theoretical coating rate per kilogram is about 8-10 square meters).
6. Acceptance and cleaning: After the construction is completed, conduct a comprehensive inspection to ensure that there are no defects or omissions, and the construction site should be cleaned up in a timely manner to keep the environment clean and tidy.

Please strictly follow the above process for construction to ensure the best decorative effect and service life. At the same time, the specific construction process may be slightly adjusted due to actual conditions, so please operate flexibly according to site conditions.

Precautions

1. Avoid mixing with other coatings during construction to avoid affecting the effect.
2. The technique should be kept uniform during construction to avoid color difference, brush marks, etc.
3. After the construction is completed, ensure that the coating is fully dry and avoid contact and friction to avoid affecting the quality of the coating.
4. After each use, be sure to close the paint can tightly and store it in an environment with a temperature between +10°C and +30°C.
5. Pay attention to protection during construction, avoid direct contact with skin, and protect eyes and face. In case of accidental contact, wash immediately with clean water. If you feel unwell, seek medical advice promptly.
6. The color block of the product is produced as a sample for color reference. The final color is subject to actual usage.



觅境--石膏系列是一款具有天然石材质感的石灰基产品，采用天然无机的矿物材料经过高温煅烧石灰石与精细加工发酵而成，结合先进环保配方精心研制而成的艺术装饰涂料。该产品具有优良的可塑性和丰富的质感表现力，同时具备良好的透气性、耐候性以及抗裂性能。其独特的质地，能够模拟出石材、肌理墙等多种自然效果，赋予墙面丰富立体的艺术感。

一、主要特性

1、环保健康：主要成分天然无机材料，无毒无味，无辐射，产品符合国家环保标准。
2、优异附着力：与基层粘结力强，不易剥落，不开裂、不变形、硬度高。
3、防潮：透气性好、防潮、吸潮，冬暖夏凉。
4、良好可塑性：可根据设计需求塑造多种纹理效果。
5、优良耐久性：耐磨损、耐擦洗、耐候性强，使用寿命长。
6、卓越表现力：色彩丰富，质感细腻，营造独特艺术氛围。

二、适用范围

适用于高端别墅、酒店、会所、商业空间等各类场所的室内装饰。

三、施工流程说明

1、基层处理：确保墙面干燥、清洁、无油污、无浮灰，如有裂缝或凹凸不平的地方需提前修补平整。对新建墙体需待其充分干燥后进行施工。
2、渗透底漆处理：使用配套的渗透底漆PM-NB104，通过滚涂、喷涂或者刷涂的工艺，对腻子基层进行渗透和固化处理。（注：渗透底漆PM-NB104包装规格5KG/桶，每公斤理论涂布率约10-15平方）。
3、底漆处理：使用配套的底漆PM-B701，通过滚涂、喷涂或者刷涂的工艺，均匀涂刷于墙面，增强面层涂料与基层的附着力，提高整体涂层的耐久性。
（注：底漆PM-B701包装规格5KG/桶，每公斤理论涂布率约6-8平方）。
4、石膏系列涂抹：将石膏系列充分搅拌均匀后，根据具体效果使用专用刮刀或专业工具，在墙面上进行石膏系列的第一遍批刮涂抹，创造出所需的纹理效果。涂抹时应按照从上至下、从左至右的顺序，确保厚度均匀一致。第一遍石膏系列干燥以后，继续进行第二遍石膏系列的批刮，当第二遍石膏系列表干到80%时，需要使用专用刮刀进行收平、压光处理。如对石膏系列效果有特殊功能性需求，可在第二遍完全干燥以后进行加强罩面处理。
（注：石膏系列包装规格20KG/桶，每公斤理论涂布率约0.8-1.2平方）。
5、加强面漆涂装：为了加强产品的耐污性和硬度，干燥打磨后的石膏系列表面，可以使用加强哑光罩面TP-A170Y，使用滚涂或喷涂的方式进行加强罩面处理，进一步保护和美化纹理效果，提高墙面的耐用度和美观度。
（注：哑光罩面TP-A170Y包装规格5KG/桶，每公斤理论涂布率约8-10平方）。
6、验收与清理：施工完毕后进行全面检查，确保无瑕疵、无遗漏，并及时清理施工现场，保持环境整洁。

请严格按照上述流程进行施工，确保最佳的装饰效果和使用寿命。同时，具体施工工艺可能因实际情况略有调整，请根据现场条件灵活操作。

四、注意事项

1、施工过程中应避免与其他涂料混合使用，以免影响效果。
2、施工时应保持手法均匀，避免出现色差、刷痕等现象。
3、施工完成后，应确保涂层充分干燥，避免触碰、摩擦，以免影响涂层质量。
4、每次开盖使用后，务必盖紧涂料罐，并且存放在温度介于 +10°C — +30°C 之间的环境中。
5、施工过程中要注意防护，避免直接接触皮肤，保护好眼睛和脸部。如不慎接触，应立即用清水清洗，如有不适应及时就医。
6、产品色块为样品制作，供颜色参考，最终颜色以实际使用情况为准。

VillaePaint
甄图艺墅家

GROWTH CULTURE 格式文化
广东格式装饰文化发展股份有限公司
GROWTH DECORATION CO.,LTD

地址：广东省佛山市顺德区容桂容里社区昌宝西路50号
Add：NO.50,Western Changbao road,Rongli residents'committee,
Ronggui,Shunde,Foshan,Guangdong
Tel：0086 757 28308787　　Fax：0086 757 23617576
Email：info@growthgroup.com.cn