EST 2025

VillaePaint

SANDS

Explore the natural world--Discovery

Explore the natural world. Discovery



SANDS LUX



SANDS MATT

SANDS EFFECT



SANDS LUX Col. 614



SANDS LUX Col. 614 + STAR P 400 SILVER





GRAND CANYON ROCK LAYER EFFECT



SANDS LUX Col. 449 D



LUX 449 E MATT | LUX 465 F MATT | LUX 462 F MATT

LUX 449 D MATT | LUX 465 E MATT | LUX 462 E MATT

LUX 449 C MATT | LUX 465 D MATT | LUX 462 D MATT

LUX 449 B MATT | LUX 465 C MATT | LUX 462 C MATT

LUX 449 A MATT | LUX 465 A MATT | LUX 462 A MATT


LUX 451 F MATT | LUX 448 E MATT

LUX 451 E MATT | LUX 448 D MATT

LUX 451 D MATT | LUX 448 C MATT

LUX 451 C MATT | LUX 448 B MATT

LUX 451 A MATT | LUX 448 A MATT

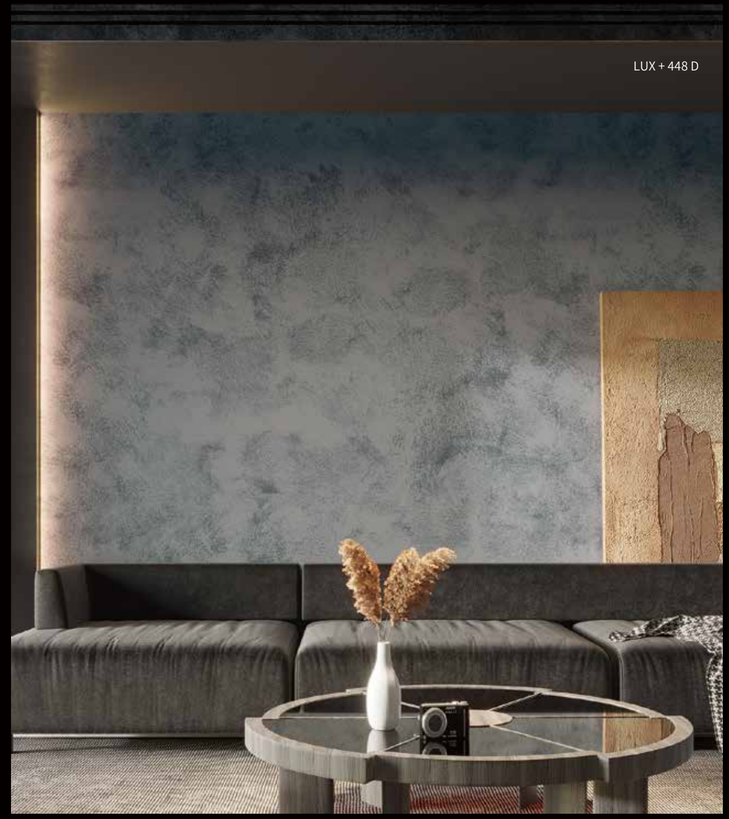

LUX 468 F MATT

LUX 466 F MATT

LUX 468 E MATT

LUX 466 E MATT

LUX 468 D MATT

LUX 466 D MATT

LUX 468 C MATT

LUX 466 C MATT

LUX 468 A MATT

LUX 466 A MATT



LUX 455 F MATT

LUX 431 F MATT

LUX 430 F MATT

LUX 455 E MATT

LUX 431 E MATT

LUX 430 E MATT

LUX 455 D MATT

LUX 431 D MATT

LUX 430 D MATT

LUX 455 C MATT

LUX 431 C MATT

LUX 430 C MATT

LUX 455 A MATT

LUX 431 A MATT

LUX 430 A MATT



LUX 439 F MATT

LUX 436 F MATT

LUX 439 E MATT

LUX 436 E MATT

LUX 439 D MATT

LUX 436 D MATT

LUX 439 C MATT

LUX 436 C MATT

LUX 439 A MATT

LUX 436 A MATT

LUX 472 F MATT

LUX 450 F MATT

LUX 461 F MATT

LUX 472 E MATT

LUX 450 E MATT

LUX 461 E MATT

LUX 472 D MATT

LUX 450 D MATT

LUX 461 D MATT

LUX 472 C MATT

LUX 450 C MATT

LUX 461 C MATT

LUX 472 A MATT

LUX 450 A MATT

LUX 461 A MATT



LUX 460 F MATT

LUX 432 F MATT

LUX 460 E MATT

LUX 432 E MATT

LUX 460 D MATT

LUX 432 D MATT

LUX 460 C MATT

LUX 432 C MATT

LUX 460 A MATT

LUX 432 A MATT



LUX + 432 D

LUX 438 F MATT

LUX 441 F MATT

LUX 440 F MATT

LUX 438 E MATT

LUX 441 E MATT

LUX 440 E MATT

LUX 438 D MATT

LUX 441 D MATT

LUX 440 D MATT

LUX 438 C MATT

LUX 441 C MATT

LUX 440 C MATT

LUX 438 A MATT

LUX 441 A MATT

LUX 440 A MATT





LUX 453 F MATT
LUX 442 E MATT
LUX 443 F MATT
LUX 453 E MATT
LUX 442 D MATT
LUX 443 E MATT
LUX 453 D MATT
LUX 442 C MATT
LUX 443 D MATT
LUX 453 C MATT
LUX 442 B MATT
LUX 443 C MATT
LUX 453 A MATT
LUX 442 A MATT
LUX 443 A MATT



LUX 463 F MATT
LUX 476 F MATT
LUX 463 E MATT
LUX 476 E MATT
LUX 463 D MATT
LUX 476 D MATT
LUX 463 C MATT
LUX 476 C MATT
LUX 463 A MATT
LUX 476 A MATT

LUX 447 F MATT

LUX 428 F MATT

LUX 446 F MATT

LUX 447 E MATT

LUX 428 E MATT

LUX 446 E MATT

LUX 447 D MATT

LUX 428 D MATT

LUX 446 D MATT

LUX 447 C MATT

LUX 428 C MATT

LUX 446 C MATT

LUX 447 A MATT

LUX 428 A MATT

LUX 446 A MATT



LUX 445 F MATT

LUX 429 F MATT

LUX 445 E MATT

LUX 429 E MATT

LUX 445 D MATT

LUX 429 D MATT

LUX 445 C MATT

LUX 429 C MATT

LUX 445 A MATT

LUX 429 A MATT


LUX 600


LUX Col. 600


LUX Col. 608


LUX Col. 601


LUX Col. 604


LUX Col. 606


LUX Col. 609


LUX Col. 602


LUX Col. 605



LUX Col. 612


LUX Col. 610


LUX Col. 603


LUX Col. 615


LUX Col. 616


LUX Col. 611



LUX Col. 608 + 452 H




LUX Col. 608 + 435 H



LUX Col. 608 + 433 H




LUX Col. 608 + 450 H



LUX Col. 608 + 439 H



LUX Col. 608 + 445 H

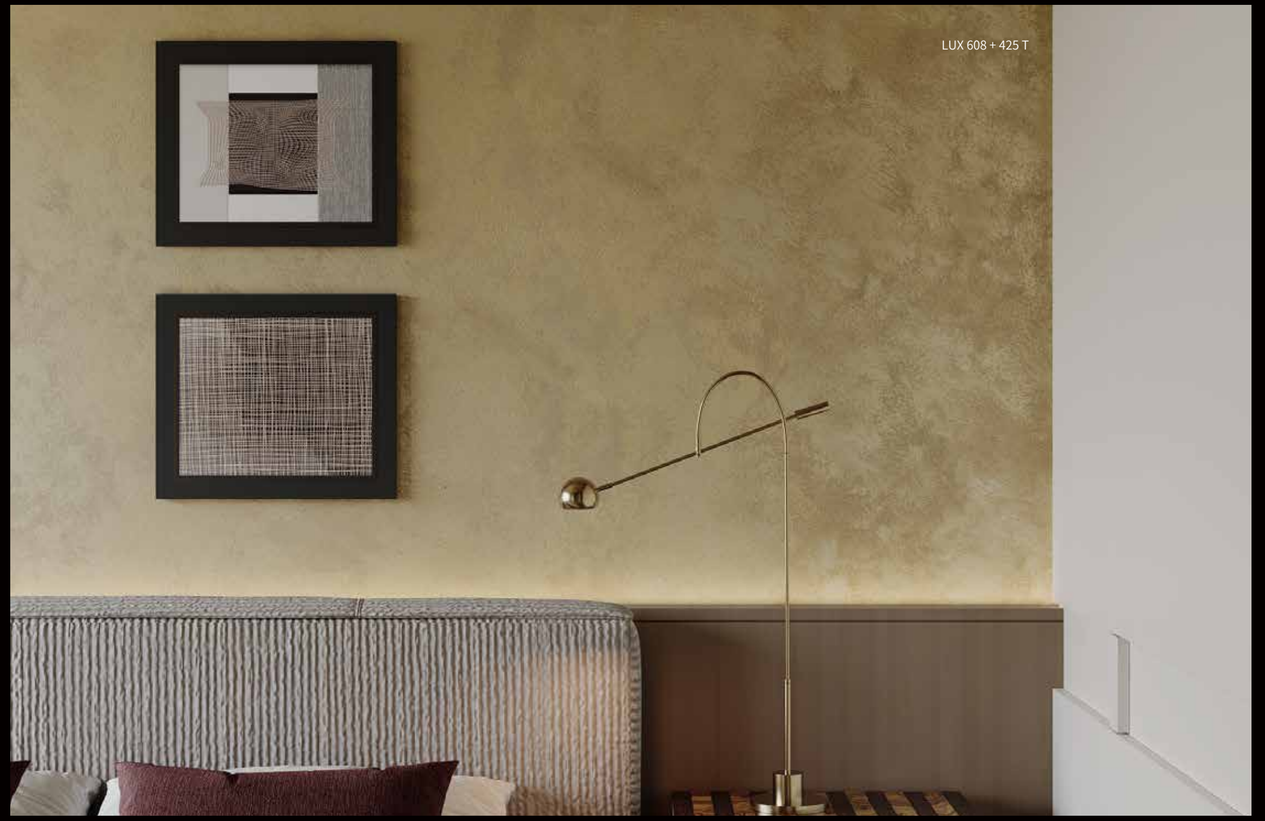

LUX 608 + 425 T




LUX Col. 608 + 436 H



LUX Col. 608 + 425 T



LUX Col. 608 + 429 H



LUX Col. 608 + 444 H



LUX Col. 608 + 425 H



LUX Col. 608 + 451 H



Base Material:①The base material is a water-based interior decorative coating with a sand-like texture and special light-reflective/refractive effects.②Products starting with digit 6 feature pearlescent effects; refer to the color card for color selection.③It is a viscous white base paint composed of acrylic emulsion, additives, and sand in fixed proportions. It can be applied to any water-based base coating, and is breathable and washable.

Tools :①Bristle Brush (100% bristle, SB-BR100-4")②Premium Wool Roller (4", SB-2A)③Imported Charm Spray Gun (GS-GMR-K800)

Finishes:①Sand Dune Finish②Grand Canyon Rock Finish

Construction Steps

1.Base Surface Treatment：Ensure the wall is dry, clean, free of oil and loose dust. Repair cracks and uneven areas in advance. Allow newly built walls to fully dry and cure before construction.
2.Penetrating Primer Treatment：Apply the matching primer (PM-NB104) to the putty base via roller coating (4", SB-2A), spray coating (GS-GMR-K800), or brush coating (100% bristle, SB-BR100-4") for penetration and curing.
3.Base Coat Treatment：Use the professional matching base coat (PM-B701), dilutable with 15–20% water. Apply evenly by roller, spray, or brush (same tools as above). Coverage: 8–10 ㎡ /kg per coat. Drying time: 3–4 hours at 25°C, relative humidity ⩽85%. Proceed only after the base coat is fully dry.

① Dune Effect: (Can be done at will) Use a (100% bristle SB-BR100-4") brush to apply the material. Each stroke should not exceed 20 cm, and apply in a staggered manner. Try to use a small, consistent amount of product for brushing, alternating the brushing in different directions. Apply evenly. At 25 ° C, wait about 3-5 minutes (depending on the situation) for slight surface drying. No need to dip the brush again. Apply on the previously treated surface, smoothing and spreading the granular surface in different directions, leveling the uneven distribution of granules, and clearly showing light and shadow layers to achieve a dune effect. At the same time, use the tip of the brush for gentle brushing, spreading the product in different directions to eliminate any accidental streaks. Ensure no obvious brush marks or substrate transparency. The application coverage is about 4-5 ㎡ /kg.

② Grand Canyon Rock Finish:Apply material with the 100% bristle brush (SB-BR100-4"). Take a small and consistent amount of product each time. Apply in irregular oblique or vertical strokes, 15–25 cm long.At 25 ° C, after slight surface drying in about 3–5 minutes (adjust as needed), do not reload the brush. Smooth and spread the granular surface in various directions, blending particles unevenly and connecting with previous strokes. Use brush tips gently to blend and remove streaks. Finish when no obvious brush marks or transparency appear. Coverage: 6–7 ㎡ /kg.

Note: Sand Dune Finish shall NOT be brushed horizontally and vertically. For Canyon Finish, follow oblique lines strictly for feeding and smoothing; do not mix horizontal and vertical strokes.

Notes for Large-Area Construction: Two-person team recommended. Pour all prepared product into a large container and mix thoroughly to avoid color differences after application. Treat joints in a W-pattern with staggered, irregular edges for seamless blending.

Precautions

1.Surface dry in 1 hour, full cure in 24 hours at 25° C. Routine cleaning with water and mild detergent is allowed 15 days after completion.
2.Shelf life: 2 years (unopened) at 25 ° C, relative humidity ⩽85%. A color difference of 20–30% may exist between the color card and actual product. Test a small sample first to confirm color. Recommended application temperature: 7–35°C.
3.Avoid direct skin contact; protect eyes and face. Rinse thoroughly with water and seek medical help if accidental contact occurs. Do not clean tools in rivers or sewers.

Usage Advice

1.The above finish instructions are based on the company’s practical experience and are accurate. However, the company assumes no liability for outcomes under uncontrollable on-site conditions.
2.Always test on a small area first to verify satisfaction with the final effect.
3.The SANDS product is made of natural materials and special resins; effects may vary with humidity, temperature, ventilation, and application method, creating a unique personalized finish each time.
4.A color difference of 20–30% may occur between batches. Verify color before full application.
5.For efficient construction and ideal results, use only the company’s recommended matching tools.



基料:①基础料是一种如沙状，并有反光折射特殊效果的室内水性基础涂料装饰产品。②6字开头的是带珠光效果，详见色卡（获取颜色，参考色卡）。③它是由丙烯酸乳液和助剂、沙子，按一定比例组成的粘稠白色基漆，详见实物，可用于任何水性基础涂料产品上，具有透气性，可水洗性。

工具：①猪鬃刷100%鬃（SB-BR100-4"）②高级羊毛滚筒(4"SB-2A)③进口魅力喷枪(GS-GMR-K800)

效果：①沙丘效果②大峡谷岩层效果

施工步骤

1、基层处理：确保墙面干燥、清洁、无油污、无浮灰，如有裂缝或凹凸不平的地方需提前修补平整。对新建墙体需待其充分干燥保养后进行施工。
2、渗透底漆处理：使用配套的渗透底漆（PM-NB104），通过高级羊毛滚筒 (4"SB-2A) 滚涂或进口魅力喷枪 (GS-GMR-K800) 喷涂或者猪鬃刷 100% 鬃（SB-BR100-4"）刷涂的工艺，对腻子基层进行渗透和固化处理。
3、底漆处理：使用专业配套的底漆（PM-B701），底漆（PM-B701）可加 15-20% 的水稀释，通过高级羊毛滚筒 (4"SB-2A) 滚涂或进口魅力喷枪 (GS-GMR-K800) 喷涂或猪鬃刷 100% 鬃（SB-BR100-4"）刷涂的工艺，均匀涂刷于墙面，一遍可施工 8-10 ㎡ /KG，涂 3-4 小时，温度 25°，相对湿度⩽85%，等待底干透才可进行下一步施工。

①沙丘效果（可随意）用猪鬃刷（SB-BR100-4"）毛刷上料，每一抹的长度不超过20cm，交错上料，尽量可能一致取用少量的产品进行粉刷，交替着向不同的方式进行刷涂，均匀上料，在25℃下，大概3-5分钟（视情况）轻微表后，无须蘸料，在刚才处理过的表面上进行涂抹，将颗粒状的表面向不同的方向进行平滑和推开的处理，把颗粒错落有致的分布推平，明显的呈现明暗的层次，来实现沙丘效果，同时用毛尖轻柔的涂抹方式，将产品向不同方向推开，驱除偶然产生的条纹现象，无明显的刷痕和透底即可，可施工4-5㎡/kg。

②大峡谷岩层效果：用猪鬃刷100%鬃（SB-BR100-4"）毛刷上面料，尽量一致取用少量的产品进行粉刷，采用倾斜状，或垂直状不规则进行涂抹，长度应在15-25cm之间，在25℃之间，大概3-5分钟（视现场情况）轻微表干后，无须蘸料，在刚才处理过的表面上进行涂抹，将颗粒状的表面向不同的方向进行平滑和推开的处理，把颗粒错落有致的分布推平，以及与之前的粉刷进行衔接，同时用毛尖轻柔的涂抹方式，将产品向不同方向推开，驱除偶然产生的条纹现象，无明显的刷痕和透底即可，可施工6-7㎡/kg。注：沙丘效果不可横竖抹，峡谷效果斜纹一定要按斜纹线，来回上料扫平，不可横竖抹。

注：大面积施工，需双人组完成，将调好的产品全部倒入一个大容器中进行调和，以避免在涂用产品之后才发现有色差。接口处理用“W”型，错落有致边缘化进行衔接。

注意事项

①25℃下需一小时表干，24小时实干，粉刷完成15天后，可用清水清洗剂进行常规清洁。
②25℃相对湿度⩽85%，未开盖产品保质期2年，产品的样品册中的色泽和实际中的色泽都会有20-30%的色差，建议先确定小样色板，此产品建议适用7℃到35℃之间。
③避免直接接触皮肤，保护好眼睛和脸部，如不慎接触，应立即用水彻底冲洗并就医，不得在河道、下水道中清洁设备。

使用忠告

综上所述的效果介绍，都基于我们公司自己的实践经验，这些经验是精确和准确的。然而在我们无法控制的不同条件下，显而易见我们将不承担对那些所提建议的后果。在使用产品的过程中，我们建议您小面积的先进行测试，由此而来预先检测一下，最终的产品效果是否能令你满意。由于考虑到SANDS产品是由天然的物质以及特殊的树脂组成，而这种特殊的组成也将依照不同的湿度、温度、通风条件以及使用方法的不同而产生不同的效果，也这是这种不同，使得该产品在每次的使用中，都会有它与众不同的个性化。产品在样品册中的色泽和实际中的色泽都会有20-30%的色差，所以我们一再建议您，在正式使用产品前，先进行小面积的测试，由此而来无论是制造商，还是销售商，他们均不承担产品在不同批量生产中所发生的色泽差别，也特别建议粉刷者在使用前对产品色泽的核查，避免使产品的粉刷出现差异。我们还建议您在粉刷前，为了SANDS产品的粉刷操作快捷与效果的理想化，我们建议您使用本公司推荐的配套工具。

TXT



Descrizione del processo



Технологическое описание



Instrucciones del proceso



وصف العملية



공정 설명



工程仕様書



प्रक्रिया वर्णन



ขั้นตอนการปฏิบัติงาน

GROWTH CULTURE 格式文化 广东格式装饰文化发展股份有限公司
GROWTH DECORATION CO.,LTD
广东省佛山市顺德区容桂容里昌宝西路50号
http://www.growthgroup.net.cn Tel: 400-8948-787

VillaePaint
甄图艺墅家